


Stage : preferred dimensions 6mx4m available
 drum riser preferred, minimum 240x160 cm
 At least 5 distribution boxes with 4 outlets, 220V:16A
 Back of the stage are 2 lightboxes with the band logo

- Monitors / Monitor outputs** : preferably 5,
 from stage right to left
- 1 XLR towards lead vocals (has own monitoring system)
 - 2 XLR or speaker at Drums (has own monitoring system)
 - 3 At Guitar
 - 4 At Bassa
 - 5 XLR towards keyboards (has own monitoring system)

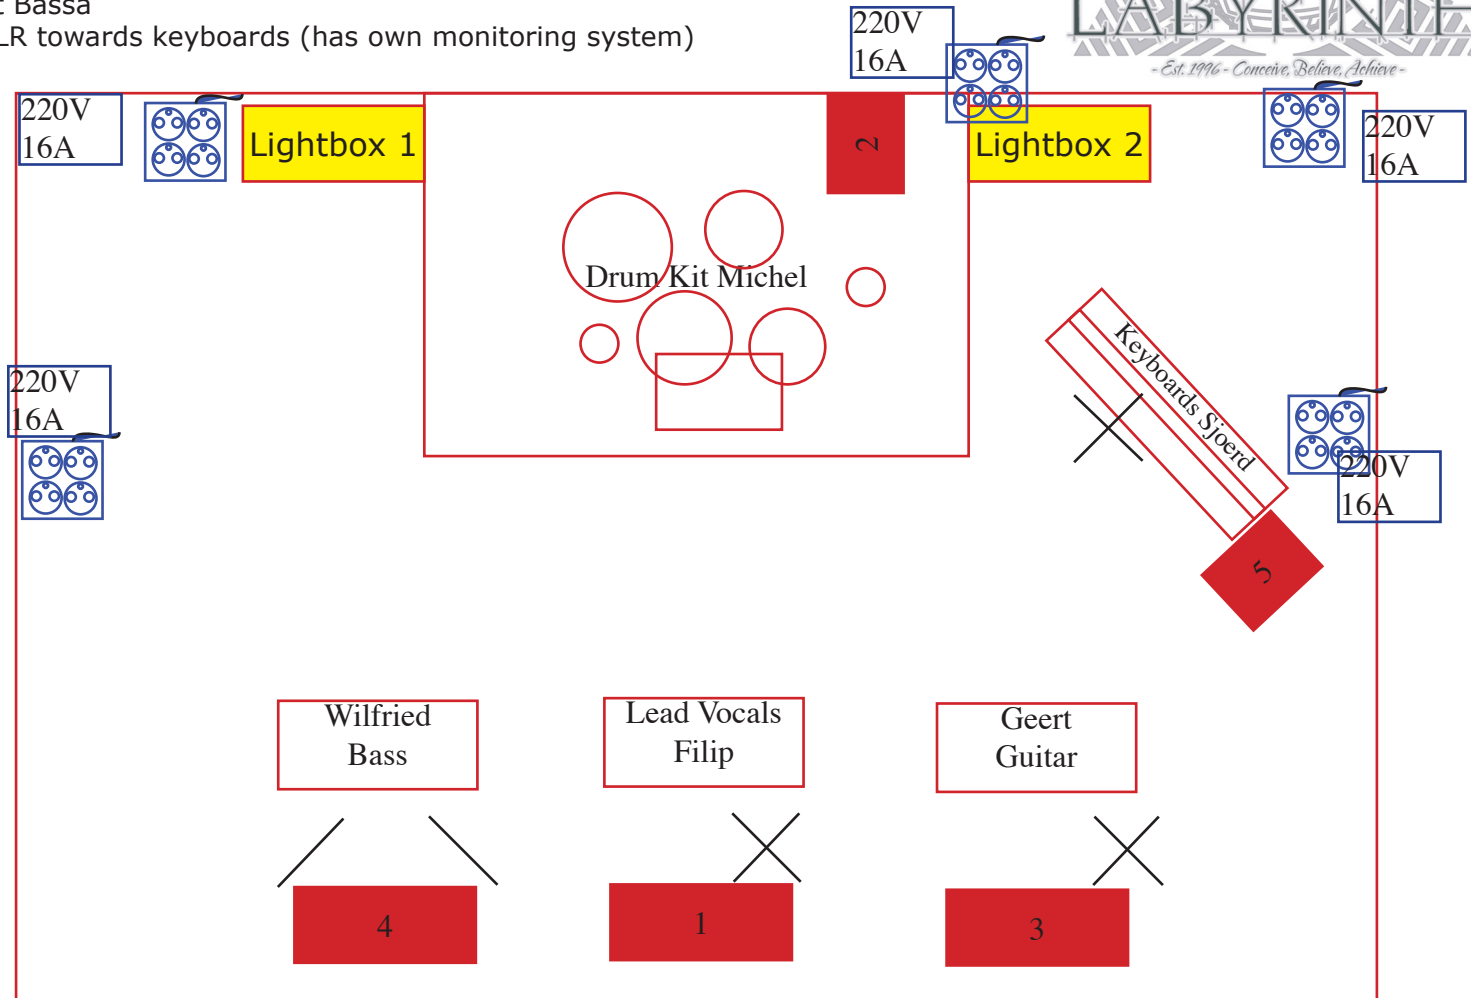

1	BD	
2	SNR	
3	Hihat	
4	Hi Tom	
5	Floor Tom 16"	
6	Floor Tom 18"	
7	Ride	
8	Bass	DI from pedal
9-10	Keyboards	from submix XLR
11-12	Guitar L-R Geert	DI
13	Lead Vocals Filip	Has Own Wireless Mic - DI from rack. In Ear monitoring on Aux 1
14	Backing Vocals Geert	
15	Backing Vocals Wilfried	
16	Backing Vocals Sjoerd	